



SUPER FAST RECOVERY RECTIFIER

SUF30G THRU SUF30J

VOLTAGE RANGE
400 to 600 Volts
CURRENT
3.0Ampere

FEATURES

- Glass passivated chip junction
- Ideal for printed circuit boards
- Ultrafast reverse recovery time
- Low switching losses, high efficiency
- Low leakage current
- High forward surge capability
- Solder dip 260 °C, 40 s
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

**PRIMARY CHARACTERISTICS**

I _{F(AV)}	3.0 A
V _{RRM}	400 V, 600 V
I _{FSM}	80 A
t _{rr}	35 ns
V _F	1.8 V, 2.0 V
T _J max.	150 °C

TYPICAL APPLICATIONS

For use in high frequency rectification and freewheeling application in switching mode converters and inverters for consumer, computer and telecommunication.

MECHANICAL DATA**Case:** P600

Epoxy meets UL 94V-0 flammability rating

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD22-B102

E3 suffix for consumer grade, meets JESD 201 class 1A whisker test

Polarity: Color band denotes cathode end**MAXIMUM RATINGS** (T_A = 25 °C unless otherwise noted)

PARAMETER	SYMBOL	SUF30G	SUF30J	UNIT
Maximum repetitive peak reverse voltage	V _{RRM}	400	600	V
Maximum RMS voltage	V _{RMS}	280	420	V
Maximum DC blocking voltage	V _{DC}	400	600	V
Maximum average forward rectified current, 0.200" (5.0 mm) lead length at T _A = 60 °C	I _{F(AV)}	3.0		A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I _{FSM}	80		A
Operating junction and storage temperature range	T _J , T _{STG}	- 55 to + 150		°C

SUF30G THRU SUF30J

 VOLTAGE RANGE
 CURRENT

 400 to 600 Volts
 3.0Ampere

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)					
PARAMETER	TEST CONDITIONS		SYMBOL	SUF30G	SUF30J
Maximum instantaneous forward voltage ⁽¹⁾	3.0 A		V_F	1.8	2.0
Maximum peak reverse current at rated peak reverse voltage		$T_A = 25^\circ\text{C}$ $T_A = 100^\circ\text{C}$	I_R	10 100	μA
Maximum reverse recovery time	$I_F = 0.5 \text{ A}$, $I_R = 1.0 \text{ A}$, $I_{rr} = 0.25 \text{ A}$		t_{rr}	35	ns
Typical junction capacitance	4.0 V, 1 MHz		C_J	60	pF

Note:

 (1) Pulse test: 300 μs pulse width, 1 % duty cycle

 THERMAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	SUF30G	SUF30J	UNIT
Typical thermal resistance ⁽¹⁾	R_{0JA}	25		$^\circ\text{C}/\text{W}$

Note:

(1) Thermal resistance from junction to ambient at 0.200" (5.0 mm) lead length with both leads attached to heat sink

ORDERING INFORMATION (Example)

PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
SUF30J-E3/54	1.834	54	800	13" diameter paper tape and reel
SUF30J-E3/73	1.834	73	300	Ammo pack packaging

RATINGS AND CHARACTERISTICS CURVES

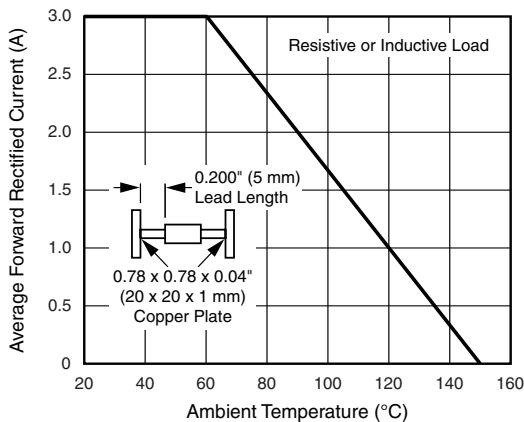
 ($T_A = 25^\circ\text{C}$ unless otherwise noted)


Figure 1. Forward Current Derating Curve

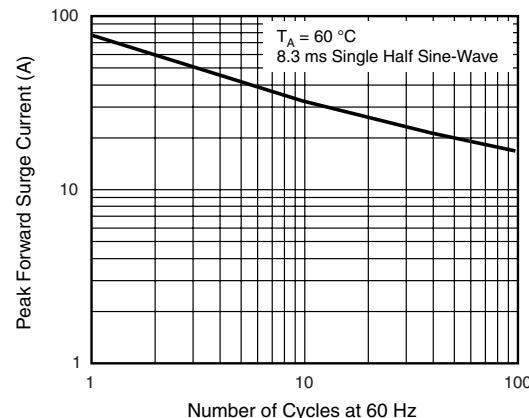


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

SUF30G THRU SUF30J

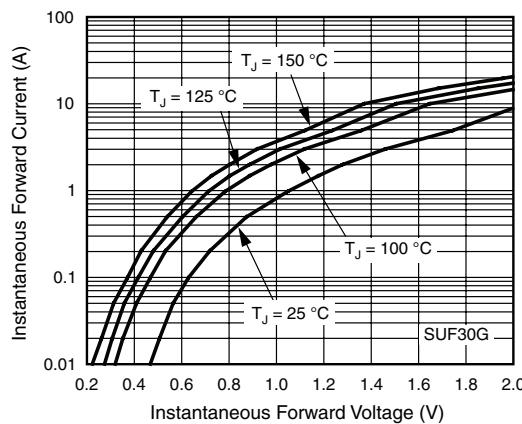
 VOLTAGE RANGE
 CURRENT
 400 to 600 Volts
 3.0Ampere


Figure 3. Typical Instantaneous Forward Characteristics

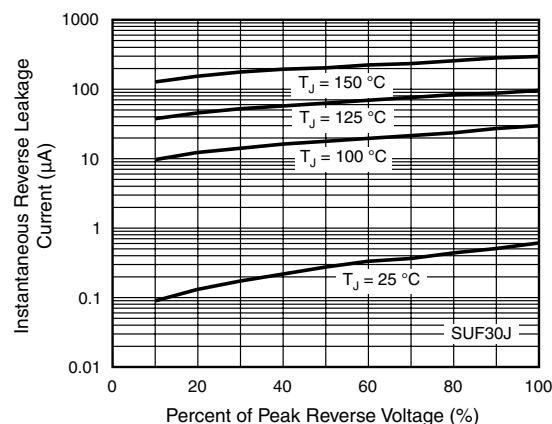


Figure 6. Typical Reverse Leakage Characteristics

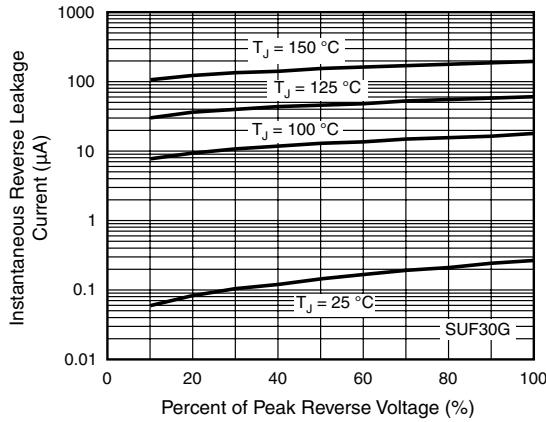


Figure 4. Typical Reverse Leakage Characteristics

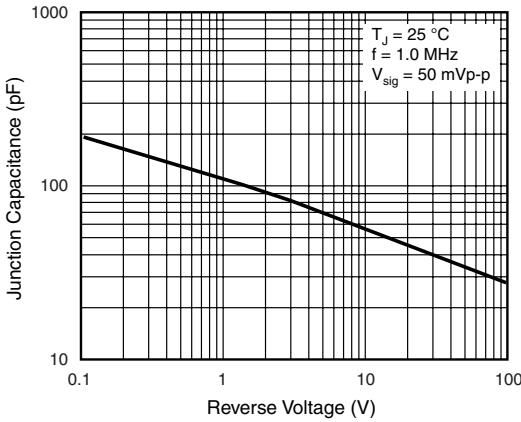


Figure 7. Typical Junction Capacitance

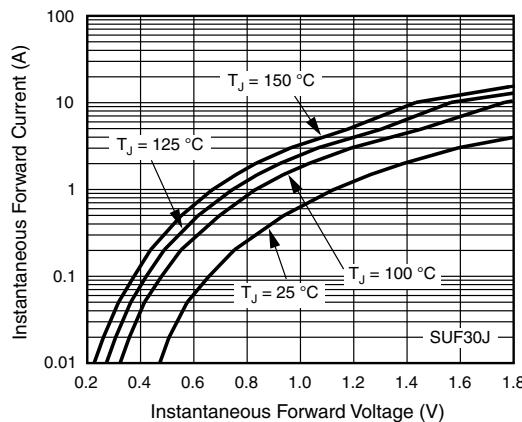


Figure 5. Typical Instantaneous Forward Characteristics

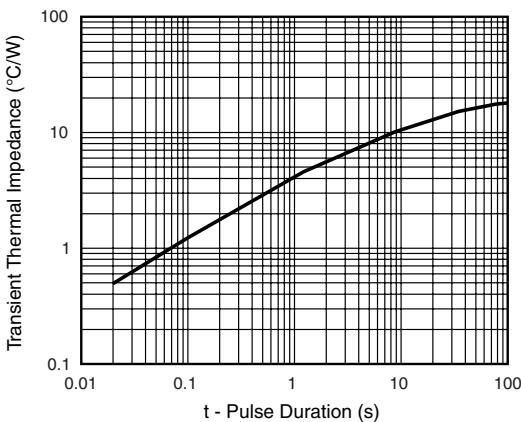


Figure 8. Typical Transient Thermal Impedance



SUPER FAST RECOVERY RECTIFIER

SUF30G THRU SUF30J

VOLTAGE RANGE
CURRENT

400 to 600 Volts
3.0Ampere

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

