

HIGH VOLTAGE FAST RECOVERY RECTIFIER

R1200F THRU R2000F

VOLTAGE RANGE
CURRENT


1200 to 2000 Volts
0.5/0.2 Ampere

FEATURES

- The plastic package carries Underwriters Laboratory
- Flammability Classification 94V-0
- Construction utilizes void-free
- molded plastic technique
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
250°C/10 seconds, 0.375" (9.5mm) lead length,
5 lbs. (2.3kg) tension

MECHANICAL DATA

- Case : JEDEC DO-41/DO-15 molded plastic body
- Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
- Polarity : Color band denotes cathode end
- Mounting Position: Any
- Weight : 0.012 ounce, 0.33 grams(DO-41)
0.014 ounce, 0.40 grams(DO-15)

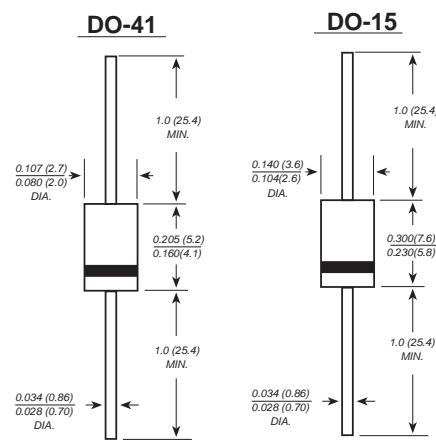

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25 C ambient temperature unless otherwise specified.
- Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

| | SYMBOLS | R1200F | R1500F | R1800F | R2000F | UNITS |
|--|-----------------|--------|-------------|--------|--------|--------------|
| Maximum repetitive peak reverse voltage | V_{RRM} | 1200 | 1500 | 1800 | 2000 | VOLTS |
| Maximum RMS voltage | V_{RMS} | 840 | 1050 | 1260 | 1400 | VOLTS |
| Maximum DC blocking voltage | V_{DC} | 1200 | 1500 | 1800 | 2000 | VOLTS |
| Maximum average forward rectified current 0.375" (9.5mm) lead length (see fig.1) | I_{AV} | | 0.5 | | 0.2 | Amp |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) | I_{FSM} | | 30.0 | | | Amps |
| Maximum instantaneous forward voltage at 0.5/0.2 A | V_F | | 2.5 | 4.0 | | Volts |
| Maximum DC reverse current $T_A=25^\circ C$ at rated DC blocking voltage $T_A=100^\circ C$ | I_R | | 5.0 | 50.0 | | μA |
| Maximum reverse recovery time (NOTE 1) | t_{rr} | | 500 | | | ns |
| Typical junction capacitance (NOTE 2) | C_J | | 15.0 | | | pF |
| Typical thermal resistance (NOTE 3) | $R_{\theta JA}$ | | 50.0 | | | $^\circ C/W$ |
| Operating junction and storage temperature range | T_J, T_{STG} | | -65 to +150 | | | $^\circ C$ |

Note: 1. Reverse recovery condition $I_F=0.5A, I_R=1.0A, I_{rr}=0.25A$

2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

3. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted


HIGH VOLTAGE FAST RECOVERY RECTIFIER

R1200F THRU R2000F


VOLTAGE RANGE
CURRENT

1200 to 2000 Volts
0.5/0.2 Ampere


AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

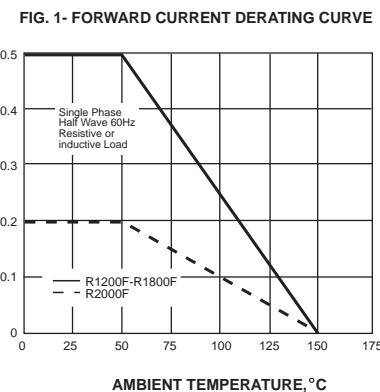


PEAK FORWARD SURGE CURRENT,
AMPERES

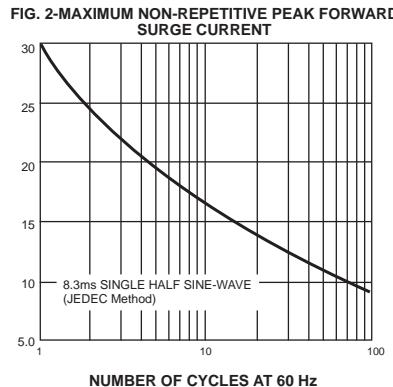


INSTANTANEOUS FORWARD
CURRENT, AMPERES

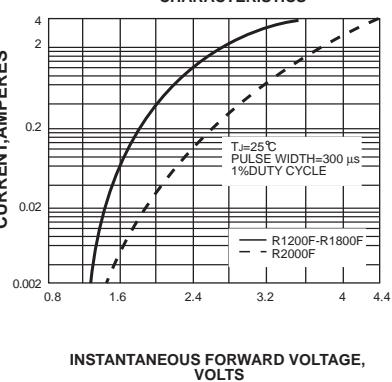

INSTANTANEOUS REVERSE CURRENT,
MICROAMPERES

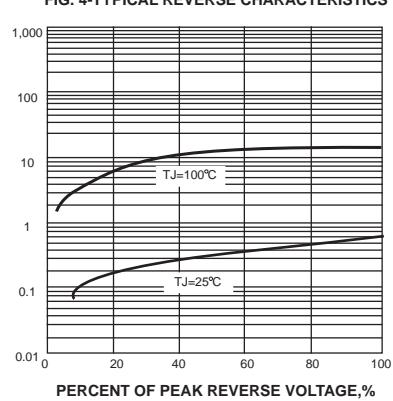

JUNCTION CAPACITANCE, pF

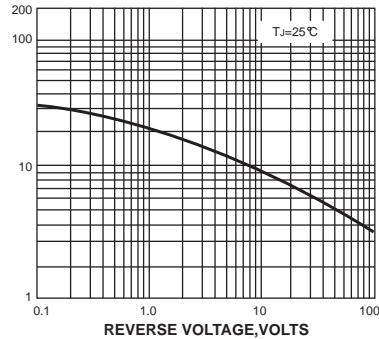

TRANSIENT THERMAL IMPEDANCE,
°C/W

