


## FEATURES

- The plastic package carries Underwriters Laboratory
- Flammability Classification 94V-0
- Metal silicon junction,majority carrier conduction
- Low power loss,high efficiency
- High temperature soldering guaranteed:  
250°C/10 seconds at terminals

**DO-41**

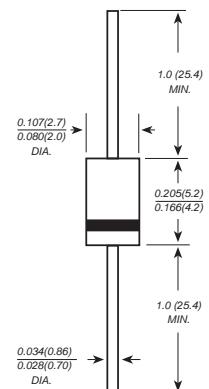

Dimensions in inches and (millimeters)

## MECHANICAL DATA

- Case: DO-41 molded plastic body
- Terminals : Plated axial leads, solderable per MIL-STD-750, Method 2026
- Polarity : Color band denotes cathode end
- Mounting Position : Any
- Weight:0.012 ounce, 0.33 grams

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	E562	E103	E153	E183	E203	E223	E253	E303	E503	E603	UNITS
Regulator current at specified test	I <sub>P</sub>	5.6	10	15	18	20	22	25	30	50	60	mA
Knee impedance test voltage at I=0.8I <sub>P</sub>	V <sub>K</sub>											VOLTS
Peak operating voltage	V <sub>BO</sub>											VOLTS
A 90Hz signal V <sub>K</sub> with RMS value equal to 10% of test voltage,V <sub>K</sub> ,is superimposed on V <sub>K</sub> :R <sub>K</sub> =V <sub>K</sub> /I <sub>K</sub>	R <sub>DK</sub>											Ohm
DC power	P <sub>TOT</sub>											Watt
Operating junction and storage temperature range	T <sub>J</sub> ,T <sub>STG</sub>											°C
Typical temperature coefficient	T <sub>C</sub>		-0.20_-0.15		-0.23_-0.32		-0.23_-0.35		-0.25_-0.45			%/°C

**Note:**1.Field-effect current regulator diodes are circuit elements that provide a current essentially independent of voltage. These diodes are especially designed for maximum impedance over the operating range. These devices may be used in parallel to obtain higher currents.

2.I<sub>P</sub> range of E562: 5.00~ 6.50mA.

3.Generally I<sub>P</sub> indicate ±10% tolerance ; suffix "A" indicate ±5% tolerance.