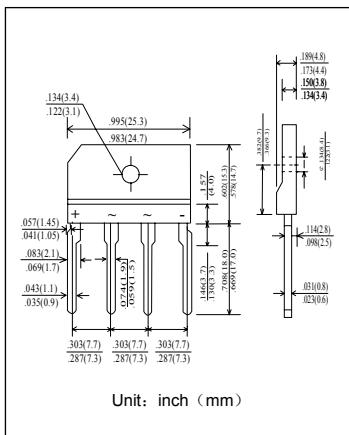


D3SB20 THRU D3SB80

 Reverse Voltage 200 to 800 V
 Forward Current 4.0A

特征 Features

- 低的反向漏电流 Low reverse leakage
- 较强的正向浪涌承受能力 High forward surge capability
- 浪涌承受能力: 170 A Surge overload rating: 170 Amperes peak

机械数据 Mechanical Data

- 封装: 塑料封装 Case: Molded Plastic
- 极性: 标记模压或印于本体 Polarity: Symbols molded or marked on body
- 安装位置: 任意 Mounting Position: Any
- 重量: 4.6 克 Weight: 4.6 Grams

极限值和温度特性 TA = 25°C 除非另有规定。

Maximum Ratings & Thermal Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	D3SB20	D3SB40	D3SB60	D3SB80	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	V _{RRM}	200	400	600	800	V
最大均方根电压 Maximum RMS voltage	V _{RMS}	140	280	420	560	V
最大直流阻断电压 Maximum DC blocking voltage	V _{DC}	200	400	600	800	V
最大正向平均整流电流 加散热片 T _c = 108°C Maximum average forward rectified current 无散热片 T _a = 25°C	I _{F(AV)}	4.0				A
峰值正向浪涌电流 8.3ms单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	I _{FSM}	120				A
最大反向峰值电流 @TA = 75°C Maximum peak reverse current full cycle	I _{R(AV)}	30				μA
典型热阻 Typical thermal resistance	R _{θJA}	6				°C/W
工作结温和存储温度 Operating junction and storage temperature range	T _j , T _{STG}	-50 --- +150				°C

电特性 TA = 25°C 除非另有规定。

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.


	符号 Symbols	D3SB20	D3SB40	D3SB60	D3SB80	单位 Unit
最大正向电压 I _F = 2.0A Maximum forward voltage	V _F	1.05				V
最大反向电流 TA = 25°C Maximum reverse current	I _R	10				μA
典型结电容 V _R = 4.0V, f = 1MHz Type junction capacitance	C _j	40				pF

D3SB20 THRU D3SB80

 Reverse Voltage 200 to 800 V
 Forward Current 4.0A


Characteristic Curves

正向特性曲线（典型值）

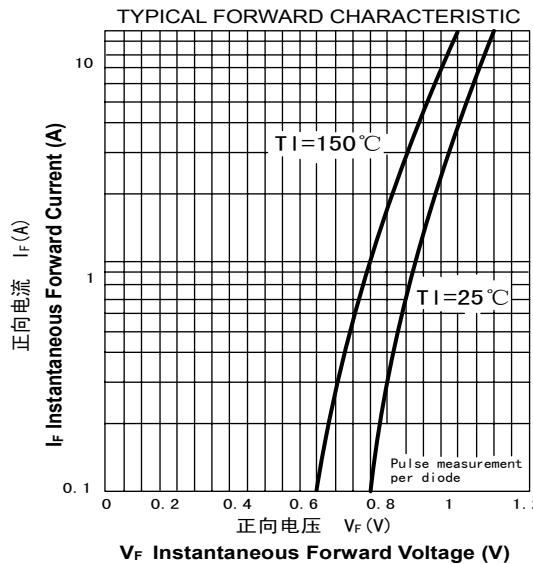


正向电流降额曲线

FORWARD CURRENT DERATING CURVE

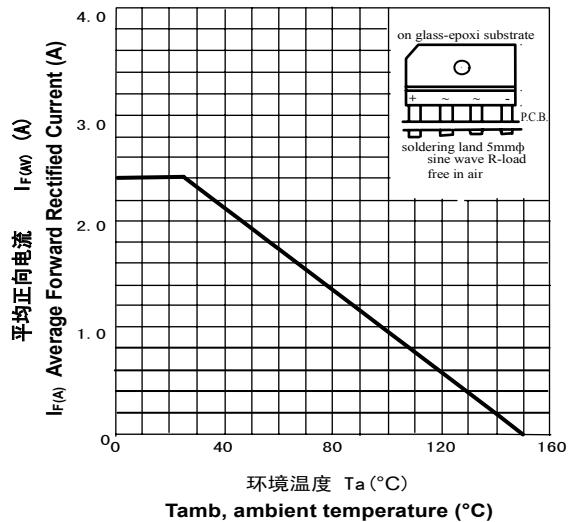


浪涌特性曲线（最大值）

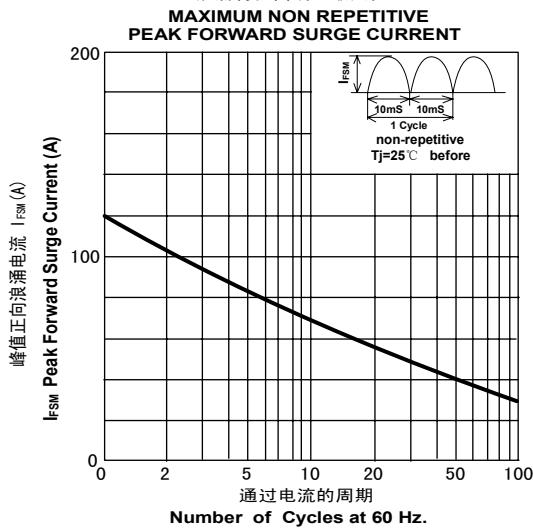

功率损耗曲线

FORWARD POWER DISSIPATION

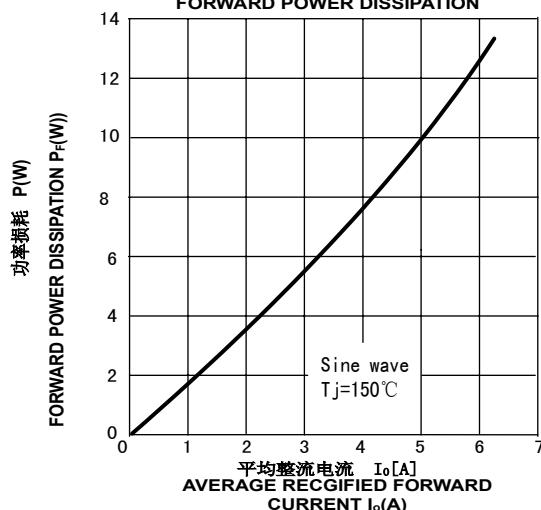

正向电流降额曲线

